

# **Digital Pressure Switch XY-PS600**

## Typical Feature

- Dual relay, Output signal NONC
- □ 4-Digits LED Display.
- D Power supply 24VDC; Optional 220VAC
- □ Accuracy level: 0.25%FS; 0.5%FS
- Multi-unit convert Bar KPa PSI
- High precision, quick response time, stable and easy setting up

#### **Brief Introduction**



XY-PS600 is an Intelligent Digital Pressure Switch Box, whole metal shell, with integrating pressure measurement, display and control function. It has a variety of excellent functions, such as one-button reset, Multi-pressure Unit Converting and it's easy to reset setting, adjusting and installation.

Two relays are built in, this series of digital pressure switches have dual relays, which can be set up two ways of normally open and normally close alarm points separately, also are able to control two ways of high and low pressure of air or liquid, in addition, it is with one key reset, at the same time, calibration, shifting display unit, setting return difference and others option functions.

The intelligent pressure switch is equipped with high-precision instrument amplifier to amplify pressure signal, built-in temperature compensation sensor, is the high precision equipment for detecting and monitoring pressure and liquid level.

XY-PS600 Intelligent Digital Pressure Switch box has stable performance and can be widely used in automatic system, mobile working machines, Medical equipment, pump, compressor, Energy and water treatment, Agricultural equipment, test system, hydraulic system and pneumatic system


#### Suggested Applications

- Equipment Automation
- Hobile Work Machine
- Water Pump and Air compressor
- Liectromechanical Equipment Automation
- Energy and Water Treatment System
- 📥 Medical Equipment
- 🔸 🛛 Hydraulic and Pneumatic Systems
- 🔸 Agricultural Equipment
- 📥 🛛 Test Jag
- Customized Applications


## More details for XY-PS600, please contact us.

Specification	
Model	XY-PG600
Gauge Pressure Range	-1~1…10…50…250…600Bar
Mirco Pressure Range	0…5…10…20КРа
Vacuum Pressure Range	-1~0Bar
Overload Capacity	200%(≤100Bar); 150%(>100Bar)
Measurement Medium	Gas or oil or other Liquid with Compatibility of SS 304 or 316
Accuracy Level	0.25%FS;0.5%FS;
Long-Term Stability/Year	Typical: ±0.2% FS;
Alarm Point	Any pressure @whole measurement range
Output	Relay; NONC
Load Capacity	220VAC 5A; 24VDC 5A
Display	4 digits LED
Operating temperature	-20~85°C
Compensation	-10~70°C
Power Supply	24VDC or 220VAC and 380VAC are optional
Electrical Protection	Surge Protection; Anti-EMI
	Reverse connection protection (Current Power Supply);
Sampling Frequency	10 times/Second
Standard Mechanical Joint	M20*1.5; NPT1/4, G1/4, Customized types

Dimension(mm)



Aviation Plug




All specifications are subject to change without notice All sales subject to standard terms and conditions

Shanghai Xuan Precision Technology Co., Ltd. No. 969, Yunshan Road Shanghai City China 201306 Tel:+86 21 59241315 • Fax: +86 21 59241315 Email: Sales@xvyanprecision.com Website: www.xvyanprecision.com

2/3

## How To Order

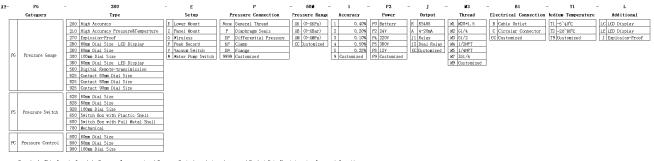

Remark: 1. This form is for whole Pressure Measurement and Pressure Control products, please read Product Date Sheet to get referance informations 2. IF you may not find right information in this form, Please contact us to get future details

### Shanghai XuYan Precision Technology Co., Ltd.

Address: No. 969, YunHan Road Pudong District Shanghai City China Tel: +86 21 59241315 Email: sales@xvyanprecision.com Website: www.xvyanprecision.com

Product Manager: Tyler Tou Cell: +86 189 1797 0680 Email: ttao@Xuyanpercision.com